



POS-335
SlimPOS



Partnering for customer delight!

Technical Specifications

Model	POS-335 slimPOS
CPU	Intel® 2550 CedarView DUAL CORE processor 1.86GHz fanless
Core Logic	Intel® 945 GSE + ICH7M
System memory	1 x DDR3 SO-DIMM 2 GB (Expandable upto 4 GB)
LCD panel size	15"
Brightness	250nits (typ)
Optional resolution	1024 * 768
Touch technology	6 wire resistive
Storage	2.5" SATA HDD 250 GB or higher
USB	4
Parallel port	1
Serial / COM	4 * RJ-45(COM 1-normal / COM 2/3/4 with 5V / 12V powered)
LAN(10 / 100 / 1000)	1
VGA	1 * DB15F
Cash drawer	1 (support 12V / 24V)
DC jack	1 * DC 19V, 1 * DC 5V
Power button	1
Power adaptor	External 65W 19V 3.4A
Mounting	VESA 75 * 75mm
Weight	5.2kg
Physical dimension	(W) 365.2 * (H) 338.6 * (D) 200mm
Warranty	1 year
MSR (USB)	3 track (optional)
2nd Display (serial)	20 x 2 VFD (optional)



- Spill and dust proof design in front bezel (IP-44)
- ideal for retail and hospitality environment

- Fanless design
- Sturdy and robust base
- Low power consumption with Intel Atom CPU
- HDD inside of base, easy for maintenance




- Screen tilting angle upto 90° vertically



- 6 wire resistive touch

Dimensions

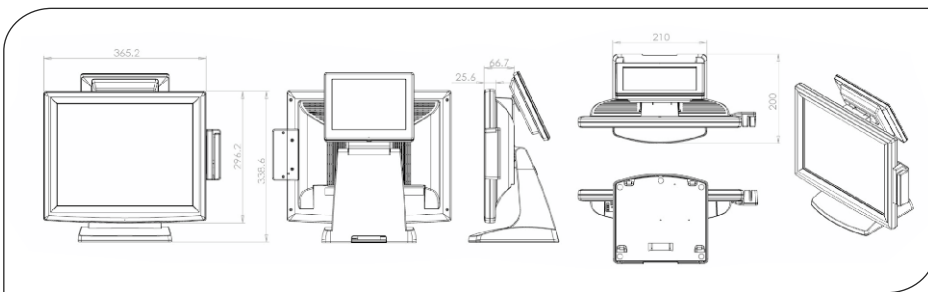

- Optional accessories Wall mounting



Essae-Teraoka Ltd.

✉ 410, 100ft Road, 4th Block,
Koramangala, Bengaluru-560 034

☎ +91 80 3021 3000

📠 +91 80 3021 3001

✉ info@essae.com

🌐 http://www.essae.com

☎ 1-800-425-3111

☎ 0-78488 12346

47 Branches

Factories in Bengaluru and Goa

300 + Resellers

Essae®
...for Excellence