



TSP800 Series

High Speed, Wide Format Barcode, Label, Receipt and Ticket Printer



- Versatile 150mm / sec. Barcode, Label, Receipt & Ticket Printer with Autocutter
- Unique 104mm / 4" print width – on paper stock up to 150g/m². 82.5 and 80mm paper rolls can also be accommodated using the optional paper guides
- Internal or External Paper Feed Paths (external for large capacity or security applications)
- "Drop-In & Print", easy paper loading
- Two colour output when required with comparable running costs to other technologies – red / black or blue / black

- Compact Footprint (180 (w) x 213 (d) x 148 (h) mm) with vertical "Desk Boot" and Wall Mount options
- ESC/POST™ compatible in standard and "Super Large" mode
- Automatic scalable raster driver for immediate A4 reduction to virtual A6. Ideal for desktop replacement printer, internet café and kiosk use





Typical Applications

- **High Quality POS Receipt Printer** with shelf edge labelling feature
- **Barcode Printer**
- **Ticket / Label / Kiosk / Information Terminal Printer** with black mark sensor

- **Kiosk Information Terminal Printer**
Desk boot option & external paper feed path
- **Internet Printer**
Screen image reduction feature
- **Remote Printer**
- **Industrial Printer**
Data logging, journals – high capacity paper rolls

TSP847D Serial Interface

TSP847C Parallel Interface



sales@Star-EMEA.com

www.Star-EMEA.com



High speed USB and Ethernet interface options (user installable)



Versatile 112mm output for all retail and kiosk environments




Unique kiosk printer for automatically scaled A4 to A6 output. (See the Star Kiosk brochure for further details)



External paper feed path for secure or high capacity applications




Wall mount and desk boot options

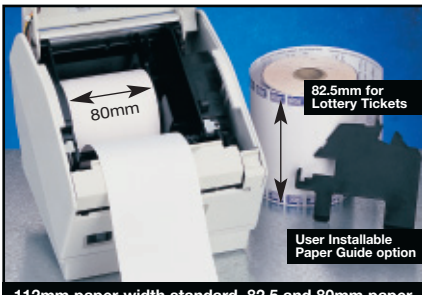

112mm paper width standard. 82.5 and 80mm paper also available with optional paper guide



Barcodes, labels, receipts and tickets all from one model at speeds up to 150mm / second

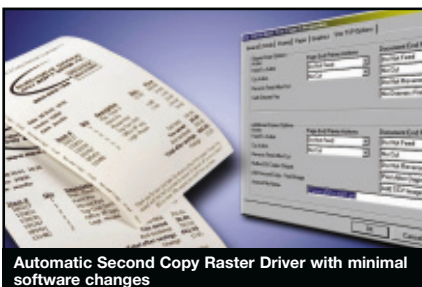

Automatic Second Copy Raster Driver with minimal software changes

TSP800 Printer Specifications

| | |
|------------------------------|---|
| Printer Method | Direct Linear Thermal |
| Print Speed | Max. 150mm per sec. / 35 lps @ 6lpi (47 lps @ 8 lpi) |
| Paper Feed Speed | 150mm per sec. |
| No. of Columns (maximum) | 104mm with A4 reduction facility |
| Resolution | 203 dpi (8 dots per mm) |
| Character Matrix | ANK. 12 x 24. IBM Graphic 12 x 32 |
| Character Set | ANK 95, 32 Int 128 Graphic |
| Print Width | up to 104mm / 832 dots |
| Code Pages / Character Table | 40 Code pages, Katakana, IBM |
| Barcodes | 9 versions / PDF417, Maxicode Option (Pending) |
| Line Spacing | 3mm or 4mm (programmable) |
| Flash ROM / SRAM | 2 x 8 Mbit plus 2 x 1 Mbit Static RAM |
| Paper Specifications: | |
| Width | 112mm |
| Roll Diameter | 100mm |
| Thickness | 0.065 ~ 0.15mm, 63 ~ 150gsm |
| Loading | "Drop-in & Print" |
| Printer Reliability: | |
| Printer | 37 million lines (CRT MCBF) 12.5 million lines (Traditional) |
| Print Head | 100 Km |
| Cutter (Guillotine) | 65 ~ 75µm. 1 million cuts |
| Emulation | Star Line & Page Mode, DP8340 Mode & ESC/POS™ |
| Interface | RS232C Serial or Parallel as standard USB, 9-pin Serial and Ethernet options |
| Data Buffer | 4 KByte / 8 KByte 1 Line Selectable |
| Peripheral Drive | 2 Drivers + 1 Compulsion Input |
| Safety Standards | UL, C-UL, TÜV, CB |
| EMI | FCC, VCCI, EN55022, CE marking |
| Drivers Available | Windows 95 / 98™, NT4.0™, XP™, OPOS™, JavaPOS™, Linux CUPS Support™, Scalable Raster Driver |
| Operating Conditions: | |
| Temperature | 5 ~ 45°C |
| Humidity | 10 ~ 90% RH (Non condensation) |
| Storage Conditions: | |
| Temperature | -20 ~ +60°C |
| Humidity | 10 ~ 90% RH (Non condensation) |
| Power Consumption | Operating / Waiting – Average 1.8 / 0.15A Uses PS60 – 24V with Hosiden connector |
| Overall Dimensions | 180 (W) x 213 (D) x 148 (H) mm |
| Weight | 1.7Kg (without paper) |
| Options | PS60 Power Supply 82.5 or 80mm Paper Guide Power Switch Cover USB, 9-pin RS232C & Ethernet Interfaces Wall and Vertical Mount Kits |
| Additional Features | Full and Partial Cut, Rear Paper Path Near End Paper Sensor Black Mark Sensor Star White or Charcoal Grey Casing Logo Store, Power Switch Cover |

Automatic Page Scaling - A4 to virtual A6

The new **TSP800 Scalable Raster Driver** provides the ability to format a page or screen image in the same way as a standard PC printer and then print that image on 112mm wide paper up to 0.15mm thick. All this at up to 150mm / sec, without the need for additional software!

